

VENETO xf²




VENETO xf² - Aluminium




Slate

- 2.0mm: 14871 674
- 2.5mm: 14872 674
- 2.5mm B_n: 14898 674
- 3.2mm: 14873 674
- 3.8mm: 14892 674




Pebble

- 2.0mm: 14871 604
- 2.5mm: 14872 604
- 3.2mm: 14873 604
- 3.8mm: 14892 604




Stone

- 2.5mm: 14872 692
- 3.8mm: 14892 692



Aluminium

- 2.0mm: 14871 672
- 2.5mm: 14872 672
- 3.2mm: 14873 672
- 3.8mm: 14892 672




Platinum

- 2.5mm: 14872 684
- 3.8mm: 14892 684




Travertine

- 2.5mm: 14872 603
- 3.8mm: 14892 603



Charcoal

- 2.0mm: 14871 610
- 2.5mm: 14872 610
- 3.2mm: 14873 610
- 3.8mm: 14892 610



Smoke

- 2.0mm: 14871 608
- 2.5mm: 14872 608
- 3.2mm: 14873 608
- 3.8mm: 14892 608



Concrete

- 2.5mm: 14872 686
- 3.8mm: 14892 686




Pewter

- 2.5mm: 14872 685
- 3.8mm: 14892 685



Grey

- 2.0mm: 14871 793
- 2.5mm: 14872 793
- 2.5mm B_n: 14898 793
- 3.2mm: 14873 793
- 3.8mm: 14892 793



Graphite

- 2.0mm: 14871 906
- 2.5mm: 14872 906
- 3.2mm: 14873 906
- 3.8mm: 14892 906



Storm

- 2.0mm: 14871 702
- 2.5mm: 14872 702
- 3.2mm: 14873 702
- 3.8mm: 14892 702



Steel

- 2.0mm: 14871 673
- 2.5mm: 14872 673
- 2.5mm B_n: 14898 673
- 3.2mm: 14873 673
- 3.8mm: 14892 673



Zinc

- 2.0mm: 14871 671
- 2.5mm: 14872 671
- 3.2mm: 14873 671
- 3.8mm: 14892 671

TECHNICAL DATA	STANDARDS	Veneto xf ² 2mm	Veneto xf ² Veneto xf ² B _n 2.5mm**	Veneto xf ² 3.2mm	Veneto Silencio xf ² 3.8mm
Classification					
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U2S P2 E1 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics					
Surface Treatment		xf ²	xf ²	xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.00mm	2.50mm	3.20mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.07mm	ca. 0.08mm	ca. 0.10mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 2400g/m ²	ca. 3000g/m ²	ca. 3900g/m ²	ca. 3450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.25mm Ø	≤ 0.30mm Ø	≤ 0.40mm Ø	≤ 0.30mm Ø
Technical performances					
Reaction to fire	EN 13501-1	C _{fl} s1	C _{fl} s1 (B _{fl} s1 for Veneto xf ² B _n)	C _{fl} s1	C _{fl} s1
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)			
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis			
Thermal resistance Underfloor heating	EN 12524	0.012m ² K/W Suitable	0.015m ² K/W Suitable	0.019m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	14dB	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally

*Elafono: 2.0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤ 30 x 2m.

**Available on request on a selection of colours

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.



Ivory

- 2.5mm: 14872 601
- 3.8mm: 14892 601



Fog

- 2.5mm: 14872 704
- 2.5mm B_n: 14898 704
- 3.8mm: 14892 704

VENETO xf² Classical marbled Greys

Main Product Features


- Superior xf² protection for extreme mechanical and chemical toughness
- The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect
- All 72 colours also available in Silencio xf² 18dB

Surface Treatment




Sustainability Tag

Veneto xf²



Veneto Silencio xf²



Logistics Information



Available in rolls
Rolls length: 30m



Laying direction:




General Information

	Veneto xf² 2mm 0200-0010-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY		According to European Classification ISO 10874 (EN 685)
	Veneto xf² 2.5mm 0200-0011-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY		According to European Classification ISO 10874 (EN 685)
	Veneto xf² 3.2mm 0200-0012-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY		According to European Classification ISO 10874 (EN 685)
	Veneto Silencio xf² 3.8mm 0200-0027-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY		According to European Classification ISO 10874 (EN 685)



Play with the Room Designer

VENETO xf²

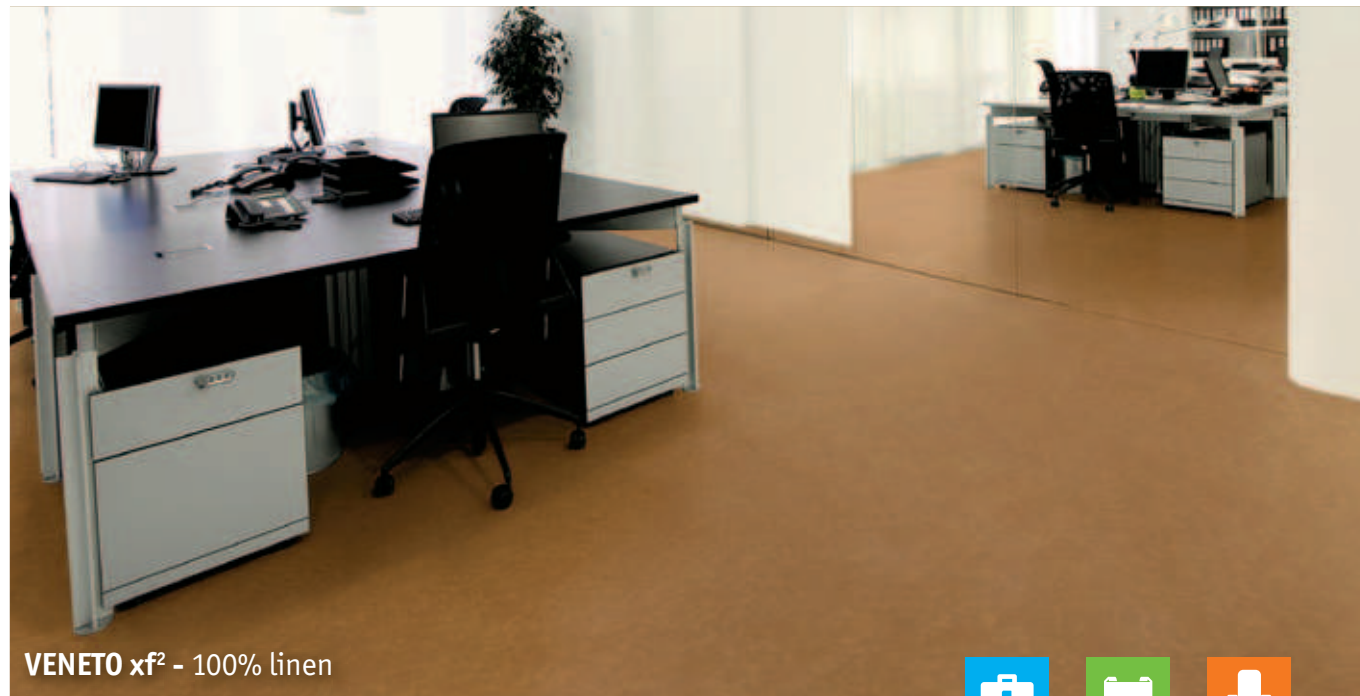

VENETO xf² - 100% linen



 Camel 2.0mm: 14871 616 2.5mm: 14872 616 3.2mm: 14873 616 3.8mm: 14892 616	 Sisal 2.0mm: 14871 611 2.5mm: 14872 611 3.2mm: 14873 611 3.8mm: 14892 611	 Ecru 2.0mm: 14871 711 2.5mm: 14872 711 2.5mmB _{ri} : 14898 711 3.2mm: 14873 711 3.8mm: 14892 711	 White 2.5mm: 14872 700 3.8mm: 14892 700	 Silk 2.5mm: 14872 625 3.8mm: 14892 625
 100% linen 2.5mm: 14872 400 3.8mm: 14892 400	 Cork 2.0mm: 14871 679 2.5mm: 14872 679 3.2mm: 14873 679 3.8mm: 14892 679	 Azurite 2.5mm: 14872 624 3.8mm: 14892 624	 Burlap 2.5mm: 14872 911 3.8mm: 14892 911	 Taupe Dark 2.5mm: 14872 714 3.8mm: 14892 714
 Tiger Eye 2.5mm: 14872 524 2.5mmB _{ri} : 14898 524 3.8mm: 14892 524	 Sandstorm 2.5mm: 14872 712 3.8mm: 14892 712	 Durango 2.5mm: 14872 121 3.8mm: 14892 121	 Neutral 2.0mm: 14871 710 2.5mm: 14872 710 3.2mm: 14873 710 3.8mm: 14892 710	 Sand 2.5mm: 14872 622 3.8mm: 14892 622

TECHNICAL DATA	STANDARDS	Veneto xf ² 2mm	Veneto xf ² Veneto xf ² B _{ri} 2.5mm**	Veneto xf ² 3.2mm	Veneto Silencio xf ² 3.8mm
Classification					
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U2S P2 E1 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics					
Surface Treatment		xf ²	xf ²	xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.00mm	2.50mm	3.20mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.07mm	ca. 0.08mm	ca. 0.10mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 2400g/m ²	ca. 3 000g/m ²	ca. 3 900g/m ²	ca. 3 450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.25mm Ø	≤ 0.30mm Ø	≤ 0.40mm Ø	≤ 0.30mm Ø
Technical performances					
Reaction to fire	EN 13501-1	C _i s1	C _i s1 (B _{ri} s1 for Veneto xf ² B _{ri})	C _i s1	C _i s1
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)			
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis			
Thermal resistance Underfloor heating	EN 12524	0.012m ² K/W Suitable	0.015m ² K/W Suitable	0.019m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	14dB	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally

*Elafono: 2.0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤ 30 x 2m.

**Available on request on a selection of colours

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

 Fossil 2.5mm: 14872 502 3.8mm: 14892 502	 Citrine 2.5mm: 14872 631 3.8mm: 14892 631
 Chocolate 2.5mm: 14872 632 3.8mm: 14892 632	 Almond 2.5mm: 14872 637 3.8mm: 14892 637

VENETO xf² Classical marbled Beiges

Main Product Features


- Superior xf² protection for extreme mechanical and chemical toughness
- The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect
- All 72 colours also available in Silencio xf² 18dB

Surface Treatment




Sustainability Tag

Veneto xf²



Veneto Silencio xf²



Logistics Information

Available in rolls
Rolls length: 30m

(2.0mm)
 (2.5mm)
 (3.2mm)

Silencio (3.8mm)

Laying direction:



General Information

 Veneto xf ² 2mm 0200-0010-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004	 According to European Classification ISO 10874 (EN 685)
 Veneto xf ² 2.5mm 0200-0011-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004	 According to European Classification ISO 10874 (EN 685)
 Veneto xf ² 3.2mm 0200-0012-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004	 According to European Classification ISO 10874 (EN 685)
 Veneto Silencio xf ² 3.8mm 0200-0027-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004	 According to European Classification ISO 10874 (EN 685)



Play with the Room Designer



VENETO xf² - Deep Blue



Deep Blue

2.5mm: 14872 767
3.8mm: 14892 767



Ocean

2.5mm: 14872 665
3.8mm: 14892 665



Sapphire

2.5mm: 14872 760
3.8mm: 14892 760



Hyacinth

2.5mm: 14872 764
3.8mm: 14892 764



Blue Purple

2.5mm: 14872 762
3.8mm: 14892 762



Lavender

2.5mm: 14872 670
3.8mm: 14892 670



Periwinkle

2.5mm: 14872 761
3.8mm: 14892 761




Begonia

2.5mm: 14872 742
3.8mm: 14892 742



Navy

2.5mm: 14872 688
2.5mm B_n: 14898 688
3.8mm: 14892 688



Horizon

2.0mm: 14871 663
2.5mm: 14872 663
3.2mm: 14873 663
3.8mm: 14892 663



Mint

2.5mm: 14872 651
3.8mm: 14892 651



Granata

2.5mm: 14872 741
3.8mm: 14892 741



Absinthe

2.5mm: 14872 695
2.5mm B_n: 14898 695
3.8mm: 14892 695



Willow Green

2.5mm: 14872 756
3.8mm: 14892 756



Apple Green

2.5mm: 14872 754
3.8mm: 14892 754

♥ Grands Classiques

TECHNICAL DATA	STANDARDS	Veneto xf ² 2mm	Veneto xf ² Veneto xf ² B _n 2.5mm**	Veneto xf ² 3.2mm	Veneto Silencio xf ² 3.8mm
Classification					
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U2S P2 E1 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics					
Surface Treatment		xf ²	xf ²	xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.00mm	2.50mm	3.20mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.07mm	ca. 0.08mm	ca. 0.10mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 2.400g/m ²	ca. 3.000g/m ²	ca. 3.900g/m ²	ca. 3.450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.25mm Ø	≤ 0.30mm Ø	≤ 0.40mm Ø	≤ 0.30mm Ø
Technical performances					
Reaction to fire	EN 13501-1	C _n s1	C _n s1 (B _n s1 for Veneto xf ² B _n)	C _n s1	C _n s1
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)			
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis			
Thermal resistance Underfloor heating	EN 12524	0.012m ² K/W Suitable	0.015m ² K/W Suitable	0.019m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	14dB	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally

*Elafono: 2.0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤ 30 x 2m.

**Available on request on a selection of colours

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.



Grass

2.0mm: 14871 650
2.5mm: 14872 650
3.2mm: 14873 650
3.8mm: 14892 650



Sage

2.5mm: 14872 753
3.8mm: 14892 753



Grege

2.5mm: 14872 757
3.8mm: 14892 757

VENETO xf² Classical marbled Blues & Greens

Main Product Features


- Superior xf² protection for extreme mechanical and chemical toughness
- The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect
- All 72 colours also available in Silencio xf² 18dB

Surface Treatment




Sustainability Tag

Veneto xf²



Veneto Silencio xf²



Logistics Information



Available in rolls
Rolls length: 30m



Laying direction: ↑↑

General Information

<p>Veneto xf² 2mm 0200-0010-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004</p>	<p>According to European Classification ISO 10874 (EN 685)</p>
<p>Veneto xf² 2.5mm 0200-0001-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004</p>	<p>According to European Classification ISO 10874 (EN 685)</p>
<p>Veneto xf² 3.2mm 0200-0012-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004</p>	<p>According to European Classification ISO 10874 (EN 685)</p>
<p>Veneto Silencio xf² 3.8mm 0200-0027-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY EN 14041:2004</p>	<p>According to European Classification ISO 10874 (EN 685)</p>

VENETO xf²



VENETO xf² - Carmine



Eggshell	Sunflower	Coral	Turmeric	Rust
2.5mm: 14872 619 3.8mm: 14892 619	2.5mm: 14872 628 3.8mm: 14892 628	2.5mm: 14872 615 3.8mm: 14892 615	2.5mm: 14872 919 3.8mm: 14892 919	2.5mm: 14872 739 3.8mm: 14892 739
Corn	Amber	Salmon	Carmine	Burgundy
2.0mm: 14871 612 2.5mm: 14872 612 3.2mm: 14873 612 3.8mm: 14892 612	2.0mm: 14871 636 2.5mm: 14872 636 2.5mm B _n : 14898 636 3.2mm: 14873 636 3.8mm: 14892 636	2.5mm: 14872 642 3.8mm: 14892 642	2.5mm: 14872 645 3.8mm: 14892 645	2.5mm: 14872 744 3.8mm: 14892 744
Terracotta	Pumpkin			
2.0mm: 14871 641 2.5mm: 14872 641 3.2mm: 14873 641 3.8mm: 14892 641	2.5mm: 14872 633 3.8mm: 14892 633			
Caramel	Pate pink	Copper	Crimson	Raspberry
2.5mm: 14872 635 3.8mm: 14892 635	2.5mm: 14872 678 3.8mm: 14892 678	2.5mm: 14872 634 3.8mm: 14892 634	2.5mm: 14872 740 2.5mm B _n : 14898 740 3.8mm: 14892 740	2.5mm: 14872 945 3.8mm: 14892 945

♥ Grands Classiques

TECHNICAL DATA	STANDARDS	Veneto xf ² 2mm	Veneto xf ² Veneto xf ² B _n 2.5mm**	Veneto xf ² 3.2mm	Veneto Silencio xf ² 3.8mm
Classification					
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 32 41	Classes: 23 34 43	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U2S P2 E1 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics					
Surface Treatment		xf ²	xf ²	xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.00mm	2.50mm	3.20mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.07mm	ca. 0.08mm	ca. 0.10mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 2.400g/m ²	ca. 3.000g/m ²	ca. 3.900g/m ²	ca. 3.450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.25mm Ø	≤ 0.30mm Ø	≤ 0.40mm Ø	≤ 0.30mm Ø
Technical performances					
Reaction to fire	EN 13501-1	C _i s1	C _i s1 (B _n s1 for Veneto xf ² B _n)	C _i s1	C _i s1
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30	R9 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)			
Static electrical propensity	EN 1815	< 2kV	< 2kV	< 2kV	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis			
Thermal resistance Underfloor heating	EN 12524	0.012m ² K/W Suitable	0.015m ² K/W Suitable	0.019m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	≥ 6	≥ 6	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	14dB	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	Yes, naturally	Yes, naturally	Yes, naturally

*Elafono: 2.0mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤ 30 x 2m.

**Available on request on a selection of colours

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

VENETO xf² Classical marbled Reds

Main Product Features


- Superior xf² protection for extreme mechanical and chemical toughness
- The classical marbled linoleum solution with soft or intense pattern variations for a timeless effect
- All 72 colours also available in Silencio xf² 18dB

Surface Treatment




Sustainability Tag

Veneto xf²



Veneto Silencio xf²



Logistics Information



Available in rolls
Rolls length: 30m



Laying direction:



General Information

	Veneto xf² 2mm 0200-0010-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	
	Veneto xf² 2.5mm 0200-0011-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	
	Veneto xf² 3.2mm 0200-0012-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	
	Veneto Silencio xf² 3.8mm 0200-0027-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	

































Play with the Room Designer

Style Elle xf²



Style Elle xf² - Ferro



 Sabbia	 Mokka	 Materia	 Abisso	 Arancione
 2.5mm: 14825 308  3.8mm: 14783 308	 2.5mm: 14825 317  3.8mm: 14783 317	 2.5mm: 14825 300  3.8mm: 14783 300	 2.5mm: 14825 309  3.8mm: 14783 309	 2.5mm: 14825 318  3.8mm: 14783 318
 Giallo	 Ferro	 Velluto	 Rosso	 Blu
 2.5mm: 14825 319  3.8mm: 14783 319	 2.5mm: 14825 305  3.8mm: 14783 305	 2.5mm: 14825 303  3.8mm: 14783 303	 2.5mm: 14825 314  3.8mm: 14783 314	 2.5mm: 14825 320  3.8mm: 14783 320

TECHNICAL DATA	STANDARDS	Style Elle xf ² 2.5mm	Style Elle Silencio xf ² 3.8mm
Classification			
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics			
Surface Treatment		xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.50mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.08mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 3 000g/m ²	ca. 3 450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm Ø	≤ 0.30mm Ø
Technical performances			
Reaction to fire	EN 13501-1	C _{fl} s1	
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)	
Static electrical propensity	EN 1815	< 2kV	
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis	
Thermal resistance Underfloor heating	EN 12524	0.015m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	

*Elafono: 2.0 mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤30 x 2m.

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.



 2.5mm: 14825 315
 3.8mm: 14783 315

Style Elle xf² Elegant linear tone on tone

Main Product Features




- Superior xf² protection for extreme mechanical and chemical toughness
- A discrete directional linear design tone on tone that can provide direction in corridors or open areas
- All 11 colours also available in acoustic version Silencio xf² 18dB
- Perfect matching with Style Emme range
- Design range where the natural patterned beauty of linoleum meets modern style

Surface Treatment






Sustainability Tag

Style Elle xf²

 96%	 100%	
74%	30%	<100 µg/m ³
*TVOC AT 28 DAYS		

Style Elle Silencio xf²

 84%	 100%	
65%	36%	<100 µg/m ³
*TVOC AT 28 DAYS		

Logistics Information

 (2.5mm) Available in rolls
Rolls length: ≤ 30lm

 Silencio (3.8mm) Rolls length: ≤ 27lm

Laying direction:



General Information

Style Elle xf²
 0200-0031-DoP-2013-07
<http://professionals.tarkett.com>
 Manufactured by Tarkett SpA
 05035 Narni, ITALY
 EN 14041:2004
 According to European Classification ISO 10874 (EN 685)

Style Elle Silencio xf²
 0200-0027-DoP-2013-07
<http://professionals.tarkett.com>
 Manufactured by Tarkett SpA
 05035 Narni, ITALY
 EN 14041:2004
 According to European Classification ISO 10874 (EN 685)



Play with the Room Designer

Style Emme xf²



Style Emme xf² - Mokka



				
Sabbia	Mokka	Materia	Abisso	Arancione
 2.5mm: 14835 208  3.8mm: 14782 208	 2.5mm: 14835 217  3.8mm: 14782 217	 2.5mm: 14835 200  3.8mm: 14782 200	 2.5mm: 14835 209  3.8mm: 14782 209	 2.5mm: 14835 218  3.8mm: 14782 218
				
Giallo	Ferro	Cemento	Asfalto	Velluto
 2.5mm: 14835 219  3.8mm: 14782 219	 2.5mm: 14835 205  3.8mm: 14782 205	 2.5mm: 14835 202  3.8mm: 14782 202	 2.5mm: 14835 207  3.8mm: 14782 207	 2.5mm: 14835 203  3.8mm: 14782 203
				
Cenere	Vulcano	Rosso	Verde	
 2.5mm: 14835 201  3.8mm: 14782 201	 2.5mm: 14835 216  3.8mm: 14782 216	 2.5mm: 14835 214  3.8mm: 14782 214	 2.5mm: 14835 215  3.8mm: 14782 215	

TECHNICAL DATA	STANDARDS	Style Emme xf ² 2.5mm	Style Emme Silencio xf ² 3.8mm
Classification			
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics			
Surface Treatment		xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.50mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.08mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 3 000g/m ²	ca. 3 450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm Ø	≤ 0.30mm Ø
Technical performances			
Reaction to fire	EN 13501-1	C _{fl} s1	
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)	
Static electrical propensity	EN 1815	< 2kV	
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis	
Thermal resistance Underfloor heating	EN 12524	0.015m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 6dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	

*Elafono: 2.0 mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤30 x 2m.

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.



 2.5mm: 14835 220
 3.8mm: 14782 220

Style Emme xf² Discretely marbled tone on tone

Main Product Features




- Superior xf² protection for extreme mechanical and chemical toughness
- A discrete marbling tone on tone as a practical solution for maintaining a high quality appearance with a lasting impression of cleanliness.
- All 15 colours also available in acoustic version Silencio xf² 18dB
- Perfect matching with Style Elle range
- Design range where the natural patterned beauty of linoleum meets modern style

Surface Treatment






Sustainability Tag

Style Emme xf²

 96% 74% Natural Renewable	 100% 30% Recyclable Recycled content	 <100µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
---	--	--

Style Emme Silencio xf²

 83% 65% Natural Renewable	 100% 36% Recyclable Recycled content	 <100µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
--	---	---

Logistics Information

 (2.5mm) **Available in rolls**
Rolls length: ≤ 30lm

 Silencio
(3.8mm) **Rolls length: ≤ 27lm**

Laying direction:




General Information

 EN 14041:2004	Style Emme xf ² 0200-0034-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	 According to European Classification ISO 10874 (EN 685)
 EN 14041:2004	Style Emme Silencio xf ² 0200-0027-DoP-2013-07 http://professionals.tarkett.com Manufactured by Tarkett SpA 05035 Narni, ITALY	 According to European Classification ISO 10874 (EN 685)



Play with the Room Designer

Etrusco xf²

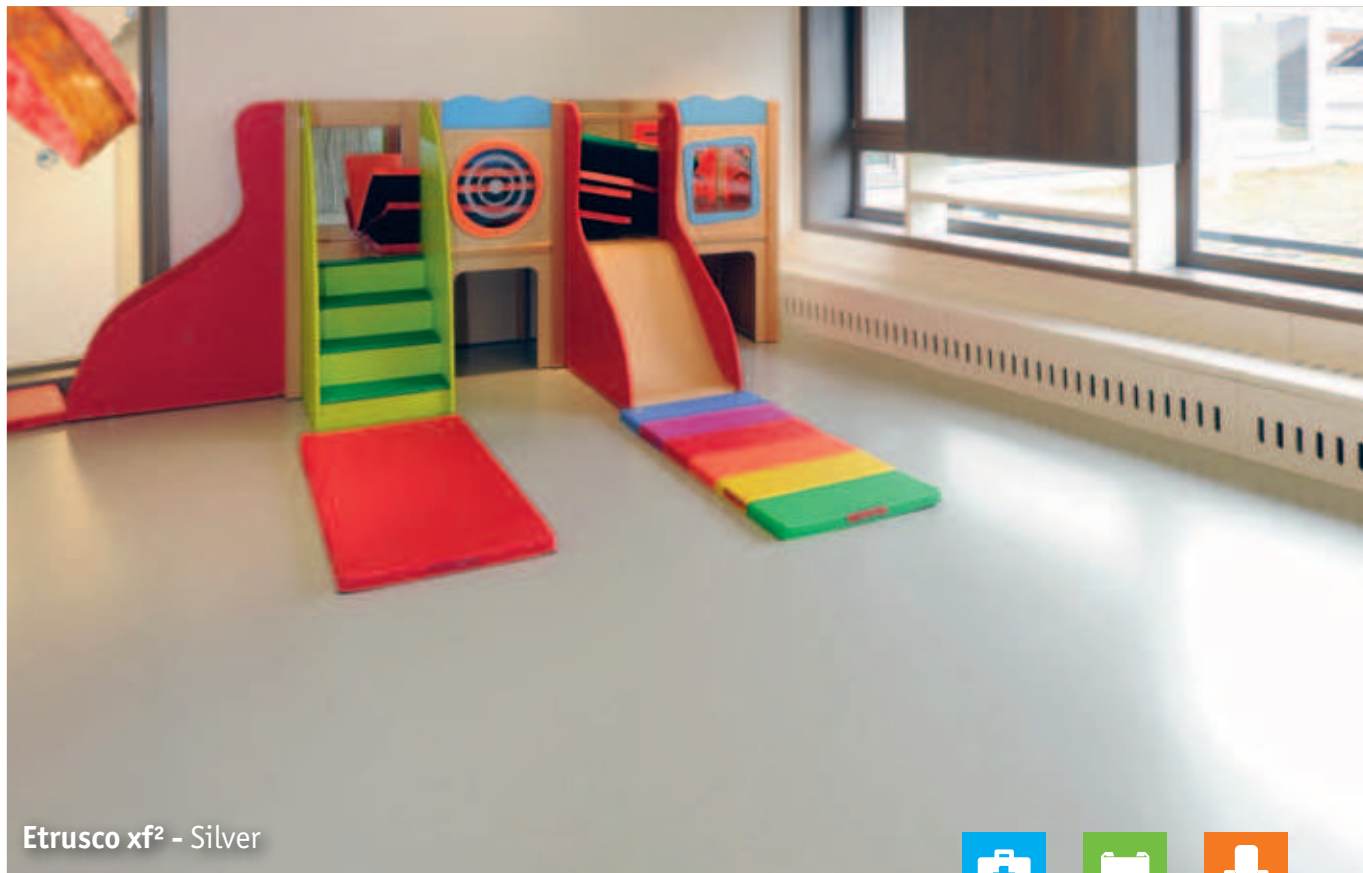

Etrusco xf² - Silver




Black	Silver	Beige	Red Berlin	Red
2.5mm: 14877 098 3.8mm: 14894 098	2.5mm: 14877 003 3.8mm: 14894 003	2.5mm: 14877 002 3.8mm: 14894 002	2.5mm: 14877 094 3.8mm: 14894 094	2.5mm: 14877 041 3.8mm: 14894 041
Orange	Yellow	Anise	Rainforest	Indigo
2.5mm: 14877 037 3.8mm: 14894 037	2.5mm: 14877 036 3.8mm: 14894 036	2.5mm: 14877 095 3.8mm: 14894 095	2.5mm: 14877 053 3.8mm: 14894 053	2.5mm: 14877 066 3.8mm: 14894 066
Cyan	Iris	Amaranth		
2.5mm: 14877 061 3.8mm: 14894 061	2.5mm: 14877 048 3.8mm: 14894 048	2.5mm: 14877 042 3.8mm: 14894 042		

TECHNICAL DATA	STANDARDS	Etrusco xf ² 2.5mm	Etrusco Silencio xf ² 3.8mm
Classification			
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 34 43	Classes: 23 33 41
UPEC Classification	UPEC Classification	U4 P3 E1/2 C2	U4 P3 E1/2 C2
Characteristics			
Surface Treatment		xf ²	xf ²
Total thickness	ISO 24346 (EN 428)	2.50mm	3.80mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.08mm	≤ 0.20mm
Total weight	ISO 23997 (EN 430)	ca. 3 000g/m ²	ca. 3 450g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm ø	≤ 0.30mm ø
Technical performances			
Reaction to fire	EN 13501-1	C _s s1	
Slip resistance	DIN 51130 EN 13893	R9 DS: ≥ 0.30	
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)	
Static electrical propensity	EN 1815	< 2kV	
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis	
Thermal resistance Underfloor heating	EN 12524	0.015m ² K/W Suitable	0.040m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6	
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 5dB	18dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB	Not applicable
Determination of antibacterial activity	ISO 22196	Yes, naturally	

*Elafono: 2.0 mm traditional, natural corkm² underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤30 x 2m.

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

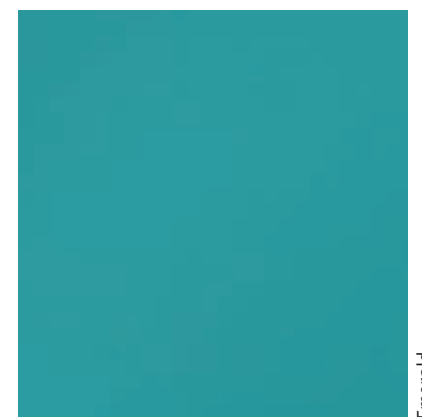

2.5mm: 14877 054
 3.8mm: 14894 054

Etrusco xf² The solid design

Main Product Features


- Superior xf² protection for extreme mechanical and chemical toughness
- Plain design with deep and radiant colours
- All 14 colours also available in Silencio xf² 18dB
- To be easily combined with any other linoleum pattern

Surface Treatment




Sustainability Tag

Etrusco xf²



Etrusco Silencio xf²



Logistics Information



(2.5mm)

Available in rolls
Rolls length: ≤ 30lm



Silencio
(3.8mm)

Rolls length: ≤ 27lm

Laying direction:



General Information




Play with the Room Designer

Veneto Sicuro xf² R10



Veneto Sicuro xf² R10 - Aluminium

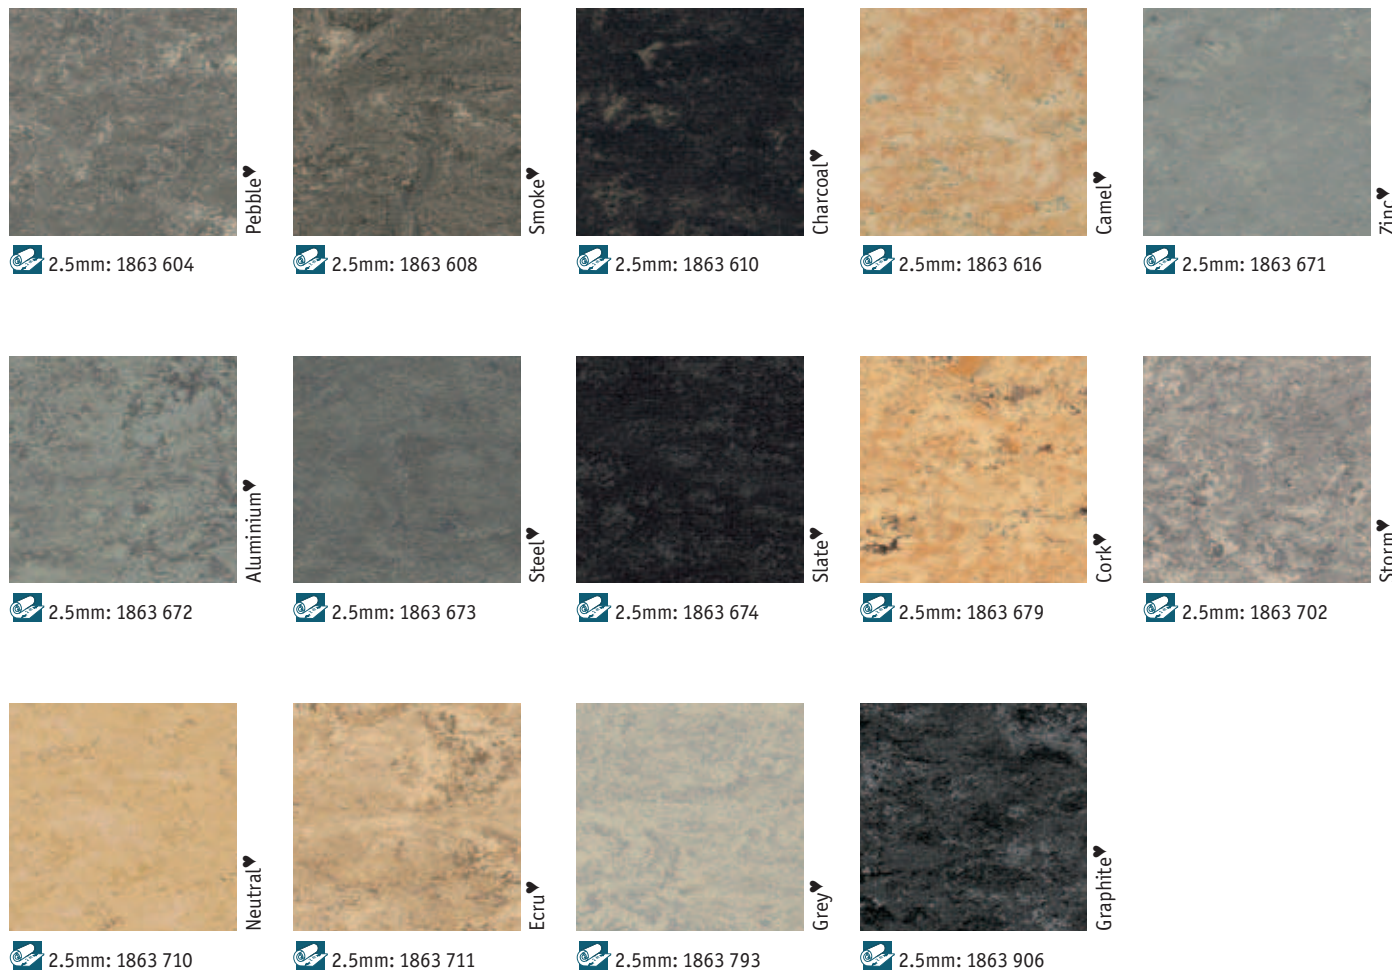


♥ Grands Classiques

TECHNICAL DATA	STANDARDS	Veneto Sicuro xf ² R10 2.5mm
Classification		
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 34 43
UPEC Classification	UPEC Classification	U4 P3 E1/2 C2
Characteristics		
Surface Treatment		xf ²
Total thickness	ISO 24346 (EN 428)	2.50mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.08 mm
Total weight	ISO 23997 (EN 430)	ca. 3 000g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm Ø
Technical performances		
Reaction to fire	EN 13501-1	C _s s1
Slip resistance	DIN 51130 EN 13893	R10 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)
Static electrical propensity	EN 1815	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis
Thermal resistance Underfloor heating	EN 12524	0.015m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 6dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB
Determination of antibacterial activity	ISO 22196	Yes, naturally

*Elafono: 2.0 mm traditional, natural corkment underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤30 x 2m.

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

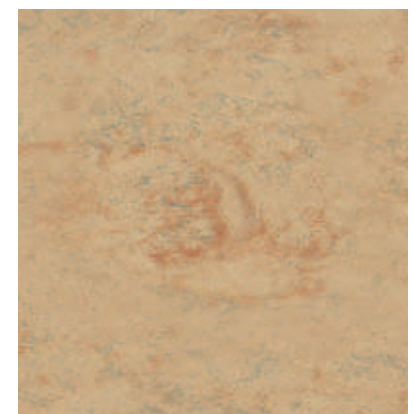

2.5mm: 1863 611

Veneto Sicuro xf² R10 Higher slip rating R10


Main Product Features

- Superior xf² protection for extreme mechanical and chemical toughness
- R10 secure grip combined with the ease of cleaning of xf²
- Classical marbled design

Surface Treatment



Sustainability Tag



Logistics Information



Available in rolls
(2.5mm) Rolls length: ≤ 30lm

Laying direction:



General Information




Play with the Room Designer

see page 476 for coordinated accessories offer

Veneto Sicuro xf² R10



Veneto Sicuro xf² R10 - Horizon

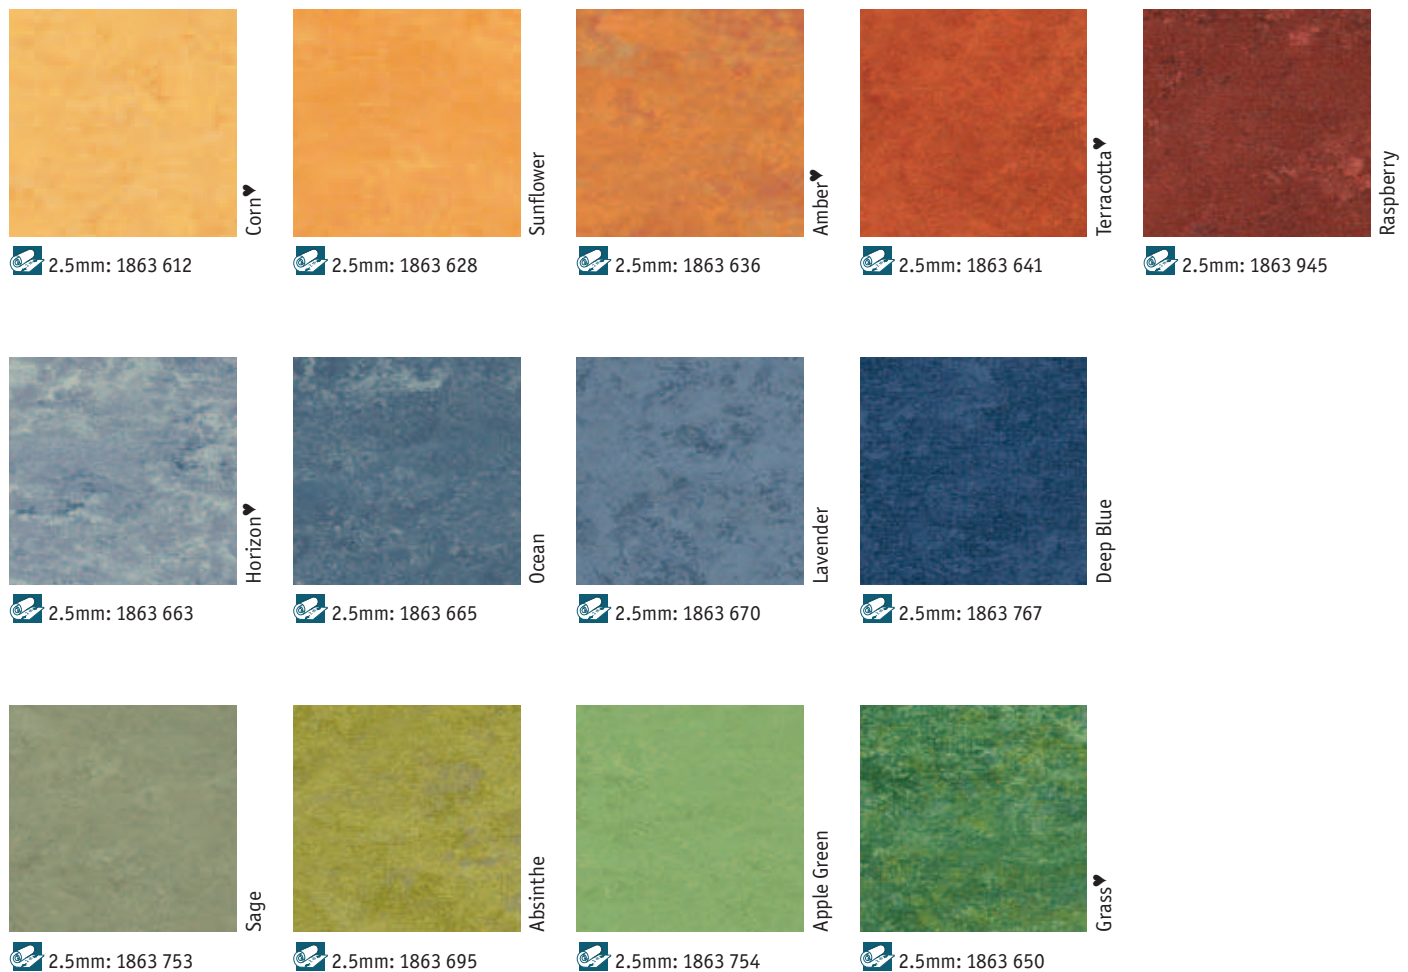

♥ Grands Classiques

TECHNICAL DATA	STANDARDS	Veneto Sicuro xf ² R10 2.5mm
Classification		
Classification	ISO 10874 (EN 685) domestic commercial light industrial	Classes: 23 34 43
UPEC Classification	UPEC Classification	U4 P3 E1/2 C2
Characteristics		
Surface Treatment		xf ²
Total thickness	ISO 24346 (EN 428)	2.50mm
Residual indentation	ISO 24343 (EN 433)	ca. 0.08 mm
Total weight	ISO 23997 (EN 430)	ca. 3 000g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm Ø
Technical performances		
Reaction to fire	EN 13501-1	C _s s1
Slip resistance	DIN 51130 EN 13893	R10 DS: ≥ 0.30
Castor chair	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)
Static electrical propensity	EN 1815	< 2kV
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis
Thermal resistance Underfloor heating	EN 12524	0.015m ² K/W Suitable
Light fastness	EN ISO 105-B02 Method 3	≥ 6
Impact sound reduction	ISO 140-8 EN ISO 717-2	≤ 6dB
Impact sound reduction with Elafono*	ISO 140-8 EN ISO 717-2	14dB
Determination of antibacterial activity	ISO 22196	Yes, naturally

*Elafono: 2.0 mm traditional, natural corkm underlay to be installed in combination with any compact Tarkett linoleum to get additional sound reduction (up to -14dB, depending on the product). Available in rolls ≤30 x 2m.

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.



2.5mm: 1863 619

Eggshell

Veneto Sicuro xf² R10 Higher slip rating R10

Main Product Features

- Superior xf² protection for extreme mechanical and chemical toughness
- R10 secure grip combined with the ease of cleaning of xf²
- 29 classical marbled design
- 20 colours are among the 20 grands classiques

Surface Treatment



Sustainability Tag

95% 75% Natural Renewable	100% 34% Recyclable Recycled content	~100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
------------------------------------	---	--

Logistics Information

Available in rolls
(2.5mm) Rolls length: ≤ 30lm

Laying direction:



General Information

CE Sicuro xf² R10
0200-0005-DoP-2013-07
<http://professionals.tarkett.com>
Manufactured by Tarkett SpA
05035 Narni, ITALY
EN 14041:2004
According to European
Classification ISO 10874 (EN 685)




Play with the Room Designer

LINOLEUM XF² SD STATIC DISSIPATIVE




Linoleum xf² SD - Abisso



Abisso

2.5mm: 14995 809

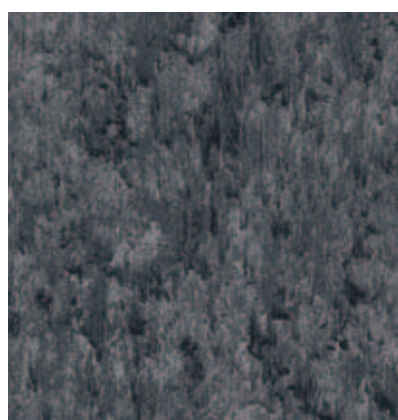

Dark Grey

2.5mm: 14995 808

TECHNICAL DATA	STANDARDS	Linoleum xf ² SD
Classification		
Classification	ISO 10581 (EN 649) - vinyl	Classes:
	ISO 10874 (EN 685) - linoleum	23
	domestic	34
	commercial	43
	light industrial	
	UPEC Classification	U4 P3 E1/2 C2
Characteristics		
Surface Treatment		xf ²
Wear layer thickness	ISO 24340 (EN 429)	Not applicable
Total thickness	ISO 24346 (EN 428)	2.50mm
Total weight	ISO 23997 (EN 430)	3 000g/m ²
Flexibility	ISO 23344 (EN 435 Method A)	≤ 0.30mm Ø
Technical performances		
Residual indentation	Average measured value	0.08mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1	C _s s1
	EN ISO 9239-1	
	EN ISO 11925-2	
Slip resistance	DIN 51130	R9
	EN 13893	DS: ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	Not applicable
Castor chair test	ISO 4918 (EN 425)	Suitable for office chairs with castors type W (Norm EN 12529)
Thermal resistance Underfloor heating	EN ISO 10456	0.015m ² K/W
	EN 12524	Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	ISO 140-8	≤ 6dB
	EN ISO 717-2	
Abrasion group	EN 660: Part 2	Not applicable
Volume loss		
Electrical insulation	VDE 100, Part 600	R _i ≥ 5x10 ⁴ Ω
Static electrical charge	EN 1815	< 2kV
Electrical resistance	ESD-approval SP-method 2472	1x10 ⁶ < R < 1x10 ⁸ Ω
	EN 1081	R ₁ ≤ 10 ⁸ Ω
	EN/IEC 61340-4-1	R ₂ ≤ 10 ⁸ Ω
	EN/IEC 61340-4-5	R ≤ 10 ⁸ Ω
Chemical resistance	ISO 26987 (EN 423)	Resistant to dilute acids, oils, fats, current solvents and alkalis
Determination of antibacterial activity	ISO 22196	Yes, naturally
Underfloor heating	—	Suitable - max 27°C

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

LINOLEUM xf² SD Static Dissipative


Main Product Features

- Stable and reliable conductivity: static dissipation to 1x10⁸ Ohms (EN 1081)
- Outstanding resistance to abrasion and chemical spills and stains
- Cost saving and environmentally friendly cleaning and maintenance with no wax or polish or stripping required
- Made from natural and renewable materials


Surface Treatment




Sustainability Tag



Logistics Information

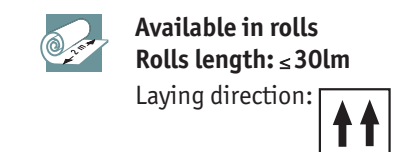

General Information

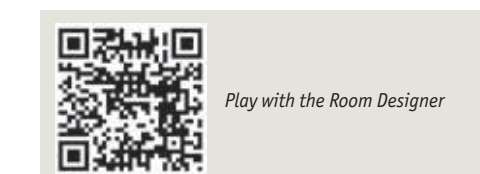



Opis
Homogeniczna wykładzina Linoleum na podkładzie jutowym
Skład: Olej lniany, mączka korkowa, żywice, pigmenty
Norma: ISO 24011 - EN 548



Klasyfikacja	Norma	Veneto xf ² 2 mm	Veneto xf ² - Style Emme xf ² - Style Elle xf ² - Veneto Essenza 2,5 mm	Veneto xf ² 3,2 mm	Veneto xf ² 3,2 mm	Veneto Sicuro xf ²	Silencio xf ²	Etrusco xf ²	Linoleum SD
Typ wykładziny	EN 686	Linoleum	Linoleum	Linoleum	Linoleum	Linoleum	Linoleum na podkładzie piankowym	Linoleum	Linoleum
Klasyfikacja EC	EN 14041	tak	tak	tak	tak	tak	tak	tak	tak
Klasyfikacja UPEC		U2SP2E1C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2	U4P3E1/2C2
Klasy użytkowe	ISO 10874-EN685								
Obiekty	Mieszaniowe	23	23	23	23	23	23	23	23
	Komercyjne	32	34	34	34	33	34	34	34
	Przemysł lekki	41	42	42	42	41	42	42	42
Podstawowe charakterystyki									
Ochrona powierzchni		xf ²	xf ² (Essenza jest akrylowana)	xf ²	xf ²	xf ²	xf ²	xf ²	xf ²
Grubość całkowita	ISO 24346-EN428	2,0 mm	2,5 mm	3,2 mm	2,5 mm	3,8 mm	2,5 mm	2,5 mm	2,5 mm
Waga całkowita	ISO 23997-EN430	ok.2400g/m ²	ok.3000 g/m ²	ok.3900 g. m ²	ok.3000 g/m ²	ok.3450g/m ²	ok.3000 g/m ²	ok.3000 g/m ²	ok.3000 g/m ²
Wgniecenie reszkowe	ISO 24343-1-EN433	ok.0,07mm	ok.0,08mm	ok.0,10mm	ok.0,08mm	≤ 0,20mm	ok.0,08mm	ok.0,08mm	ok.0,08mm
Elastyczność	ISO 24344-EN435 Metoda A	≤ 25mm φ	≤ 30mm φ	≤ 40mm φ	≤ 30mm φ	≤ 30mm φ	≤ 30mm φ	≤ 30mm φ	≤ 30mm φ
Forma dostawy	ISO 24341-EN426		30 x 2m	30 x 2m	30 x 2m	27 x 2m	30 x 2m	30 x 2m	30 x 2m
Właściwości techniczne									
Ognioodporność	EN 13501-1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1	C _{fl} -s1
Redukcja dźwięków	ISO 140-8								
	EN ISO 717-2	≤ 4dB	≤ 6dB	≤ 6dB	≤ 6dB	≤ 18dB	≤ 5dB	≤ 6dB	≤ 6dB
Redukcja dźwięków z Elefano	ISO 140-8								
	EN ISO 717-2	14dB	14dB	14dB	14dB	nie dotyczy	14dB	nie dotyczy	nie dotyczy
Oporność na oziarnienie korek krzesel	ISO 4918-EN425	Oporna na działanie kólek biurowych - typ W (norma EN 12529)							
Elektrostatyczność	EN 1081	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV	< 2kV
Właściwości elektrostatyczne									
	EN 1815	-	-	-	-	-	-	-	R _s ≤ 10 ⁹ Ω
		-	-	-	-	-	-	-	R _s ≤ 10 ⁸ Ω
	EDS -metoda zatwierdzenia 2472	-	-	-	-	-	-	-	1x10 ⁶ < R _s < 1x10 ⁹ Ω
	EN/IEC 61340-4-1	-	-	-	-	-	-	-	R _s ≤ 10 ⁹ Ω
Izolacja elektryczna	VDE 0100, część 600	-	-	-	-	-	-	-	R _i > 5x10 ⁴ Ω
Antypoślizgowość	EN 13893	DS≥0.30	DS≥0.30	DS≥0.30	DS≥0.30	DS≥0.30	DS≥0.30	DS≥0.30	DS≥0.30
	DIN 51130	R9	R9	R9	R10	R9	R9	R9	R9
Oporność chemiczna	ISO 26987-EN423	Oporne na działanie rozcieńczonych kwasów, oleje, tłuszcze, alokohole, acetonu i zasady							
Przewodzenie ciepłe wzniosłość instalacji na ogrzewaniu podłogowym	EN 12524	0.012m ² K/W	0.015m ² K/W	0.019m ² K/W	0.015m ² K/W	0.040m ² K/W	0.015m ² K/W	0.015m ² K/W	0.015m ² K/W
		Produkt odpowiedni do instalacji na ogrzewaniu podłogowym							
Trwałość kolorów	ISO 105-B02, Metoda3	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Bakteriostatyczność		Produkt naturalnie bakteriostatyczny							
Kolorystyka		20	72 (Veneto) - 29 (Essenza) - 15 (Style Emme)-11 (Style Elle)	20	29	112	14	2	

* Certyfikat C2C Gold odnosi się do Linoleum Veneto Essenza

CUSTOMS TARIFF : 4820500000001




WESTERN EUROPE: Australia: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 47 88 002 • Belgium: Tarkett France Belux - Tel. +32 36 35 98 80 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 5406 8070 • France: Tarkett SAS - Tel. +33 1 43 20 42 41 • Germany: Tarkett Holding GmbH, Bereich Objekte - Tel. +49 62 33 800 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 210 4546 340 • Italy: Tarkett S.p.A. - Tel. +39 054 7551 • Luxembourg: Tarkett C2C SA - Tel. +352 949 233 800 • Netherlands: Tarkett Holding GmbH, Vestigings Nederland - Tel. +31 76 57 80 700 • Norway: Tarkett AS - Tel. +47 32 20 92 00 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Spain: Tarkett Floors S.L. - Tel. +34 91 338 00 35 • Sweden: Tarkett Sverige AB - Tel. +46 773 25 19 00 • Switzerland: Tarkett Holding GmbH, Bereich Objekte Schweiz - Tel. +41 04 233 79 24 • Turkey: Tarkett Arçen - Tel. +90 212 213 65 90 • United Kingdom: Tarkett Ltd - Tel. +44 (0) 1922 654 640 • BALTIC COUNTRIES: Tarkett Baltics - Tel. +370 20 262 220 • Czech Republic: Tarkett France SAS, org. slova - Tel. +420-271 001 602 • Hungary: Tarkett France SAS - Tel. +36 1 437 8100 • Poland: Tarkett Polska Sp. z o.o. - Tel. +48 22 639 31 68 • Russian Federation: ZAO Tarkett RUS - Tel. +7 495 775 3737 • Slovakia: Tarkett France SAS, org. slova - Tel. +421 248 291 317 • South East Europe: Tarkett Trade d.o.o. - Tel. +385 23 7557 649 (44) 569 12 21 • Ukraine: Tarkett UA - Tel. +38 (0) 44 569 12 21 • ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd - Tel. +61 2 88 53 12 00 • China: Tarkett Floor Covering (Shanghai) Co. Ltd. - Tel. +86 (21) 60 95 48 39 ext.842 • Hong Kong: Tarkett Asia Pacific Ltd. - Tel. +852 2512 8716 • India: Tarkett France (India Branch) - Tel. +91 21 4302 4073 • South East Asia: Tarkett Asia Pacific Ltd. - Tel. +65 97 57 30 45 • AFRICA: Tarkett International: Tel. +33 1 43 20 41 01 • MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 • Israel: Tarkett International: Tel. +33 1 43 20 41 01 • NORTH AMERICA: USA: Tarkett Inc. - Tel. +1 713 869 5811 / Johnsonville - Tel. +1 440 543 8916 • Canada: Tarkett Inc. - Tel. +1 450 293 173 • LATIN AMERICA: Brazil: Tarkett Fadenac - Tel. 55 12 394 7108 • Other countries: Tarkett America Latina - Tel. +55 11 3047 7200 • Argentina • Chile • Uruguay: Tarkett Latam Mercosur - Tel. 54 11 48 00 74 28 / 54 9 11 44 46 88 82 • Colombia • Panama • Caribbean: Tarkett Latam Andino - Tel. 57 1 759 5781 / 57 322 873 1566 • Bolivia • Ecuador • Paraguay • Peru: Tarkett Latam Sur Oeste - Tel. 56 11 3047 7233 • Mexico / Central America: Tarkett Latam Mexico - Tel. 52 735 19 43 939 / 52 95 51 07 9524

LINOLEUM

Linoleum xf™ SD Static Dissipative

CERTYFIKATY I KLASYFIKACJE	NORMY	Linoleum xf™ SD antystatyczna wykładzina rozpraszająca
Rodzaj pokrycia podłogowego	ISO 24011 / EN 548	Homogeniczna podłoga Linoleum na podkładzie jutowym
Certyfikat CE	EC 14041	Tak
Klasyfikacja	ISO 10874 / EN 685	obiekty mieszkaniowe: 23 obiekty kontraktowe: 34 obiekty przemysłu lekkiego: 42
CHARAKTERYSTYKA TECHNICZNA	NORMY	Linoleum xf™ SD antystatyczna wykładzina rozpraszająca
Ochrona powierzchni		xf™
Grubość całkowita	ISO 24346/EN 428	2,5 mm
Ciężar całkowity	ISO 23997/EN 430	3000 g/m ²
Wgniecenie resztkowe	ISO 24343-1/EN 433	ok. 0.08 mm
Elastyczność	ISO 24344/EN 435 Metoda A	≤ 30 mm Ø
Forma dostawy	ISO 24341/EN 426	rolki ok. 30 mb x 2m
Kolorystyka		2
Antypoślizgowość	DIN 51130	R9
	EN 13893	DS: ≥ 0.30
WŁAŚCIWOŚCI TECHNICZNE	NORMY	Linoleum xf™ SD antystatyczna wykładzina rozpraszająca
Ognioodporność	EN ISO 13501-1	Cfl s 1
Redukcja dźwięków	EN ISO 140-8	≤ 6 dB
	EN ISO 717-2	
Oddziaływanie kótek krzeseł	EN 425	Odpowiedni do kótek krzeseł biurowych typu W (Norma EN 12529)
Przewodzenie ciepłe	EN 12524	ok. 0.015 m ² K/W
Ogrzewanie podłogowe		Odpowiedni
Trwałość kolorów	ISO 105-B02 metoda 3	≥ 6
Ochrona bakteriostatyczna	JIS Z 2801	tak
Odporność chemiczna	EN 423	Odporny na rozcieńczone kwasy, oleje, tłuszcze, rozpuszczalniki oraz zasady
Antypoślizgowość	DIN 51130 / BGR 181	R9
Dynamiczny współczynnik tarcia	EN 13893	DS: ≥ 0.30
Elektrostatyczność	EN 1815	< 2 kV
Antyelektrostatyczność	EN 1081	R1 ≤ 10 ⁸ Ω - rozpraszająca R2 ≤ 10 ⁸ Ω - rozpraszająca
	ESD-approval SP metoda 2472	1x10 ⁶ < R < 1x10 ⁸ Ω - rozpraszająca
	EN/IEC 61340-4-1	R ≤ 10 ⁸ Ω
Izolacja elektryczna	VDE 0100, Part 600	RI > 5x10 ⁴ Ω

CUSTOMS TARIFF : 482050000000F



AKCESORIA

TASMA MIEDZIANA

□ 1256727



LISTWY

Nowa oferta uformowanych listew stworzona dla idealnego efektu wykończenia. Gama kolorów i materiałów została dobrana tak, aby idealnie dobrać listwę do podłogi i zapewnić profesjonalną instalację.

Nowa listwa Linoleum (SOS)

dostępne w opcji: 6/8/10 cm wys x 220 cm dł.

Nowa listwa Linoleum (SIS)

SIS dostępne w opcji:
6/8/10 cm wys x 240 cm dł.

Lino SIS narożnik zewnętrzny dostępny w opcji: 6/8/10 cm wys. x 10 cm szer. (wymiary narożnika 13x13 cm)



THE ULTIMATE
FLOORING EXPERIENCE