


ACCZENT EXCELLENCE 70 TOPAZ



Clic - Beige



Clic

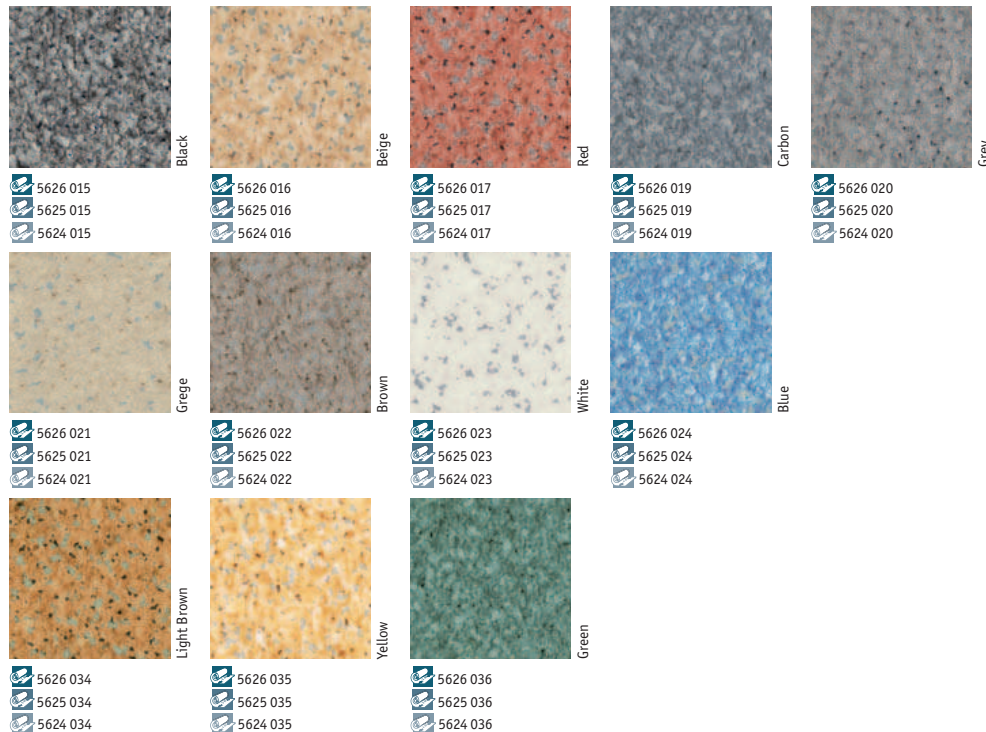

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN430)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean
Abrasion group	EN 660-2	Group T: ≤ 2mm ³
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _s S1 glued over any A2 _s or A1 _s substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-8 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.



5626 018
5625 018
5624 018

ACCZENT EXCELLENCE 70 TOPAZ Clic

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



Play with the Room Designer


ACCZENT EXCELLENCE 70 TOPAZ



Antk Oak - Light Brown



Soft Elm



Brown

- 5626 001
- 5625 001
- 5624 001



Natural

- 5626 028
- 5625 028
- 5624 028

Antik Oak



Light Natural

- 5626 027
- 5625 027
- 5624 027



Light Brown

- 5626 005
- 5625 005
- 5624 005



White

- 5626 026
- 5625 026
- 5624 026

Beech



Light Natural

- 5626 006
- 5625 006
- 5624 006



Beige Yellow

- 5626 025
- 5625 025
- 5624 025

Warm Oak



Soft Natural

- 5626 046
- 5625 046
- 5624 046



Soft Natural

- 5626 047
- 5625 047
- 5624 047



Soft Beige

- 5626 048
- 5625 048
- 5624 048

Arcadia



Light Yellow

- 5626 032
- 5625 032
- 5624 032



Middle Natural

- 5626 029
- 5625 029
- 5624 029




Brown Natural

- 5626 030
- 5625 030
- 5624 030



Light Greige

- 5626 031
- 5625 031
- 5624 031



Brown

- 5626 049
- 5625 049
- 5624 049

Smart Walnut

TECHNICAL DATA	STANDARDS	Accent Excellence 70 Topaz
Classification		
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 34 43
Characteristics		
Total thickness	ISO 24346 (EN 428)	2.50mm
Wear layer thickness	ISO 24340 (EN430)	0.70mm
Total weight	ISO 23997 (EN 430)	2 900g/m ²
PU treatment	-	TopClean
Abrasion group	EN 660-2	Group T: ≤ 2mm ³
Technical performances		
Residual indentation	Average measured value	≤ 0.10mm
	ISO 24343-1 (EN 433) requirement	
Reaction to fire	EN 13501-1	C _s S1 glued over any A2 _{s1} or A1 _{s1} substrate (concrete) and over any derivative wood substrate
Slip resistance	DIN 51130 EN 13893	R10 μ ≥ 0.30
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No damage
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms
Chemical resistance	ISO 26987 (EN 423)	High resistance
Hygiene	-	Does not contribute to infection spreading
Thermal resistance Underfloor heating	EN ISO 10456	0.02m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	Standards EN ISO 10140-8 EN ISO 717/2	13dB

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

Winter Pine



Warm Oak

- 5626 043
- 5625 043
- 5624 043



Soft Beige

- 5626 045
- 5625 045
- 5624 045



Soft Natural

- 5626 044
- 5625 044
- 5624 044

ACCZENT EXCELLENCE 70 TOPAZ Wood

Main Product Features

- Warmth and comfort
- Very comfortable flooring with 13dB acoustic
- 2.5mm total thickness
- Available in 2, 3 and 4 meter widths

Surface Treatment



Sustainability Tag



(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Available in rolls: 2m, 3m & 4m Rolls length: 241m

Laying direction:



Wood

General Information



According to European Classification ISO 10874 (EN 685)




Play with the Room Designer

Heterogeniczne wykładziny winylowe

Accent Excellence 70 Topaz

Accent Excellence 70 Topaz to heterogeniczna wykładzina winylowa wzmocniona włóknem szklanym, pozbawiona wypełniaczy w warstwie użytkowej. Dzięki zabezpieczeniu poliuretanem PUR tworzy znakomitą ochronę przed grzybami i bakteriami. Ochronę powierzchni zapewnia powłoka Sanitized®. Ma właściwość redukcji dźwięków.

Norma ISO 10582 - EN 649.



CERTYFIKATY I KLASYFIKACJE	NORMY	Accent Excellence 70 Topaz
Rodzaj pokrycia podłogowego	EN 649	Heterogeniczna kompaktowa winylowa
Certyfikat CE	EN 14041	Tak
Klasyfikacja	EN 685	Do użytku komercyjnego: 34 Do użytku w przemyśle: 43
CHARAKTERYSTYKA TECHNICZNA NORMY Accent Excellence 70 Topaz		
Grubość warstwy użytkowej	EN 429	0,70 mm
Ochrona powierzchni		TOPCLEAN
Grubość całkowita	EN 428	2,5 mm
Ciężar całkowity	EN 430	2900 g/m ²
Forma dostawy	EN 426	rolki ok. 23 mb x 200 / 300 / 400 cm
WŁAŚCIWOŚCI TECHNICZNE NORMY Accent Excellence 70 Topaz		
Stabilność wymiarów	EN 434	≤ 0,10 %
Ognioodporność	EN 13501-1	Cl s1 na betonie klasy A1 fl lub A2 fl i na każdym podłożu drewnopochodnym
Grupa ścieralności	EN 660-2	Grupa T: ≤ 2 mm ³
Wgniecenie resztkowe	EN 433	≤ 0,10 mm
Oddziaływanie kółek krzeseł	EN 425	Brak uszkodzeń
Oddziaływanie nógzek od mebli	EN 424	Brak uszkodzeń
Zwijanie się pod wpływem ciepła	EN 434	≤ 8 mm
Przewodzenie ciepłe	EN 10456	ok. 0,02 m ² K/W
Ogrzewanie podłogowe		Odpowiedni
Redukcja dźwięków	EN ISO 140-8 EN ISO 717-2	ΔLw 13 dB
Trwałość kolorów	EN ISO 105-B02	≥ 6
Odporność chemiczna	EN 423	Bardzo dobra
Antypoślizgowość	EN 13893 DIN 51130	μ ≥ 0,30 R9
Elektrostatyczność	EN 1815 EN 1081	< 2 kV na betonie > 10 ⁹ Ω
Ochrona przeciw grzybom i bakteriom	ISO 22196:2007	Sanitized Efekt bakteriostatyczny 99,99% Zapobiega rozwojowi grzybów
Kolorystyka		24 (w tym drewno: 11)

Stan na luty 2012. Powyższe informacje mogą ulec zmianie.



Accent Excellence 70 Topaz	Welding Rod N°	Accent Excellence 70 Topaz	Welding Rod N°
001	1287 344	024	1294 485
005	1287 153	025	1287 318
006	1294 316	026	1287 279
015	1287 183	027	1289 538
016	1294 209	028	1292 387
017	1287 397	029	1291 451
018	1292 455	030	1287 475
019	1291 216	031	1289 803
020	1287 278	032	1287 378
021	1294 728	034	1292 101
022	1287 373	035	1292 374
023	1287 331	036	1287 390

ralia: Tarkett Australia Pty Ltd - Tel. +61 2 96 34 7373 • Austria: Tarkett Holding GmbH, Niederlassung Wien - Tel. +43 1 478 80 62 • Baltic States: Tarkett Wyk_adziny Sp. z o.o. - Tel. +370 37 262 220 • Belgium: S.A. Tarkett Tel. +32 16 35 98 80 • Brazil: Tarkett FADEMAG - Tel. +55 12 3954 7244 • Canada: Tarkett Inc. - Tel. +1 450 293 173 • China: Tarkett Asia Pacific Limited - Shanghai Representative Office - Tel. +86 21 60 95 6838 / +86 21 6859 • Czech Republic: Tarkett SAS, org. slozka - Tel. +420 271 001 602 • Denmark: Tarkett A/S - Tel. +45 43 90 60 11 • Finland: Tarkett Oy - Tel. +358 9 5406 5870 • France: Tarkett France - Tel. +33 1 41 20 42 49 many: Tarkett Holding GmbH, Bereich Objekt - Tel. +49 (0) 62 33 810 • Greece: Tarkett Monoprosopi Ltd - Tel. +30 2 10 576 3889 • Hong Kong: Tarkett Asia Pacific Ltd. - Tel. +852 251 18716 • Hungary: Tarkett SAS - Tel. +36 8150 • Italy: Tarkett S.p.A. - Tel. +39 02 893 411 • Luxembourg: Tel. +352 949 211 8804 • Middle East: Tarkett Middle East - Tel. +961 151 3363/4 • Netherlands: Tarkett Holding GmbH - Vestiging Nederland - Tel. +31 80 760 • Norway: Tarkett AS - Tel. +47 32 20 92 00 • Poland: Tarkett Wyk_adziny Sp. z o.o. - Tel. +48 22 639 31 66 • Portugal: Tarkett SA - Tel. +351 21 427 64 20 • Russian Federation: Tarkett Russia - Tel. +7 4 95 777 69 Slovakia: Tarkett SAS - Tel. +421 248 291 317 • Singapore: Tarkett Far East - Tel. +65 67 43 53 84 • South East Europe: Tarkett Trade d.o.o. - Tel. +381 21 7557 649 • Spain: Tarkett Floors S.L. - Tel. +34 91 358 00 35 • Sweden: tt Sverige AB - Tel. +46 771 25 19 00 • Switzerland: Tarkett Holding GmbH, Bereich Objekt Schweiz - Tel. +41 (0) 43 233 79 24 • Turkey: Tarkett ASPEN - Tel. +90 212 213 65 80 • Ukraine: Tarkett UA - Tel. +380 (44) 569 12 United Kingdom: Tarkett Ltd - Tel. +44 (0) 1622 854 040 • North America: Johnsonite - Tel. +1 440 543 8916 • Tarkett Inc. USA - Tel. +1 713 869 5811 • Latin America: Tarkett FADEMAG - Tel. +55 12 3954 7244 • Tarkett national: Tel. +33 1 41 20 41 01



www.tarkett.com